



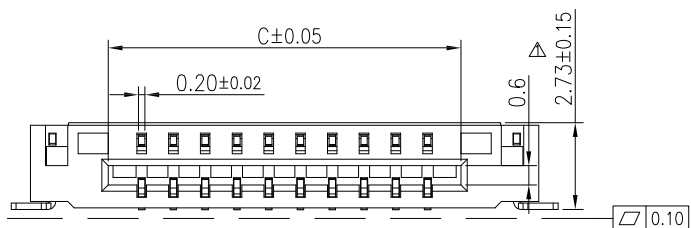


NOTES:

- HUOSNGT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- ACTUATOR: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- TERMINAL:PHOSPHOR BRONZE
PLATING:GOLD FLASH OR MATTE-TIN OR TIN (LEAD FREE)
- FITTING NAIL:BRASS
PLATING:MATTE-TIN OR TIN (LEAD FREE)

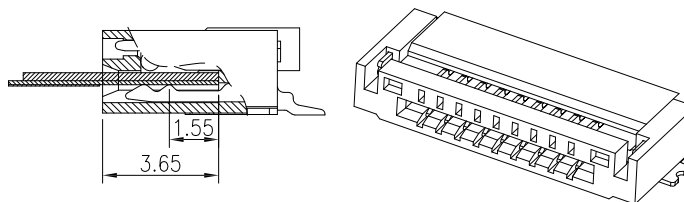

No. of contacts	Dimensions			No. of contacts	Dimensions		
	A	B	C		A	B	C
4	11.21	3.0	5.05	21	28.21	20.0	22.05
5	12.21	4.0	6.05	22	29.21	21.0	23.05
6	13.21	5.0	7.05	23	30.21	22.0	24.05
7	14.21	6.0	8.05	24	31.21	23.0	25.05
8	15.21	7.0	9.05	25	32.21	24.0	26.05
9	16.21	8.0	10.05	26	33.21	25.0	27.05
10	17.21	9.0	11.05	27	34.21	26.0	28.05
11	18.21	10.0	12.05	28	35.21	27.0	29.05
12	19.21	11.0	13.05	29	36.21	28.0	30.05
13	20.21	12.0	14.05	30	37.21	29.0	31.05
14	21.21	13.0	15.05	31	38.21	30.0	32.05
15	22.21	14.0	16.05	32	39.21	31.0	33.05
16	23.21	15.0	17.05	33	40.21	32.0	34.05
17	24.21	16.0	18.05	34	41.21	33.0	35.05
18	25.21	17.0	19.05	35	42.21	34.0	36.05
19	26.21	18.0	20.05	36	43.21	35.0	37.05
20	27.21	19.0	21.05	37	44.21	36.0	38.05

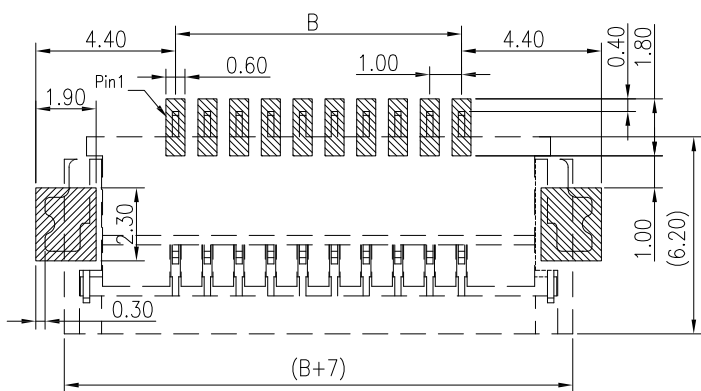

CABLE INSERT DIM.

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

UNITS	mm
MAT'L	
FINISH	
Q'TY	PCS

QWYCONN 深圳市启威源电子有限公司
SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

PART NO.(INTENDED USE) 10273-GX-nPWB	TITLE: 1.0前插后掀盖大锁扣 H2.73
APPD:	DWG NO.: 10273-GX-nPWB
CHKD:	SCALE: 1/1
DR: HU 2016.09.28	SHEET: 1/1
	REV: A

X.± 0.3	X°± 5°
.X± 0.25	.X°± 2°
.XX± 0.20	.XX°± 1°
.XXX± 0.10	.XXX°± 0.5°