


PC BOARD LAYOUT

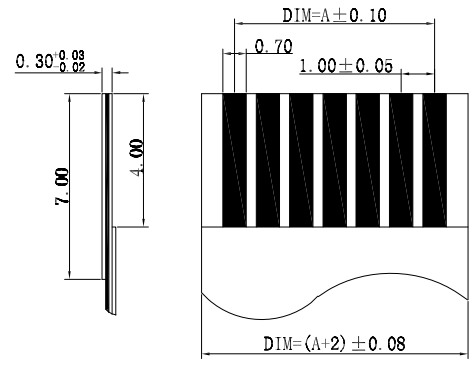

NO. of Contacts (n)	Dimensions		
	A	B	C
004	3.0	5.07	7.8
005	4.0	6.07	8.8
006	5.0	7.07	9.8
007	6.0	8.07	10.8
008	7.0	9.07	11.8
009	8.0	10.07	12.8
010	9.0	11.07	13.8
011	10.0	12.07	14.8
012	11.0	13.07	15.8
013	12.0	14.07	16.8
014	13.0	15.07	17.8
015	14.0	16.07	18.8
016	15.0	17.07	19.8
017	16.0	18.07	20.8
018	17.0	19.07	21.8
019	18.0	20.07	22.8
020	19.0	21.07	23.8
021	20.0	22.07	24.8
022	21.0	23.07	25.8
023	22.0	24.07	26.8
024	23.0	25.07	27.8
025	24.0	26.07	28.8
026	25.0	27.07	29.8
027	26.0	28.07	30.8
028	27.0	29.07	31.8
029	28.0	30.07	32.8
030	29.0	31.07	33.8
031	30.0	32.07	34.8
032	31.0	33.07	35.8

Electrical  
 Voltage: 50 V AC(rms)/DC  
 Current: 1A AC(rms)/DC  
 Contact Resistance: 40 mΩ max(initial)  
 Dielectric Withstanding Voltage: 200 V AC/rms  
 Insulation Resistance: 800 MΩ min  
 Operating Temp: -40°C ~ +85°C

UNITS mm		<b>QWYCONN</b> 深圳市启威源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.		
MAT'L		PART NO.(INTENDED USE) 1. 0-CB-nPWB(无焊片)	TITLE: 1. 0双面接卧贴不带焊片 (H2. 0)	
FINISH		APPD:	DWG NO.: 1. 0-CB-nPWB(无焊片)	
Q'TY PCS		CHKD:	SCALE SHEET REV. 1/1 1/1 A	
DR: HU 2016. 09. 28				

X ± 0.3	X° ± 5°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	.XX° ± 1°
.XXX ± 0.10	.XXX° ± 0.5°