



NoTe:
 RATED VOLTAGE(MAX):220V
 RATED CURRENT(MAX):2.0A
 AMBIENT TEMPERATURE RANGE:-20℃~+85℃
 CONTACT RESISTANCE:20mΩMAX
 INSULATION RESISTANCE:1000MΩMIN
 HOUSING: PA9T UL94V-0
 CONTACT: PHOSPHOR BRONZE TIN-LEAD PLATED

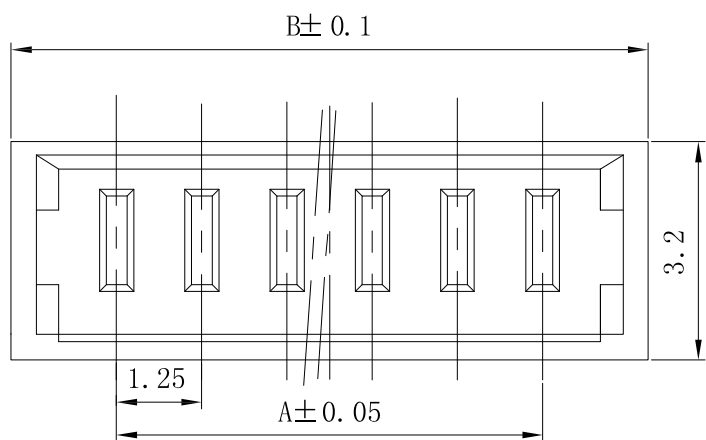

极数	尺寸	
	A	B
直式		
1.25T-2P	1.25	4.35
1.25T-3P	2.50	5.60
1.25T-4P	3.75	6.85
1.25T-5P	5.00	8.10
1.25T-6P	6.25	9.35
1.25T-7P	7.50	10.60
1.25T-8P	8.75	11.85
1.25T-9P	10.00	13.10
1.25T-10P	11.25	14.35
1.25T-11P	12.50	15.60
1.25T-12P	13.75	16.85
1.25T-13P	15.00	18.10
1.25T-14P	16.25	19.35
1.25T-15P	17.50	20.60
1.25T-16P	18.75	21.85

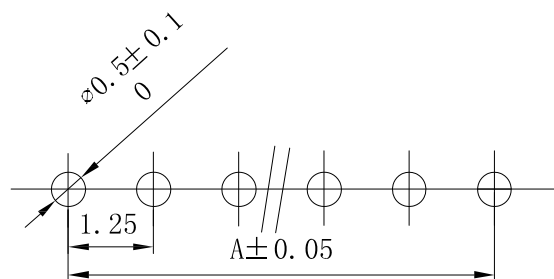

X.± 0.3	X°± 5'
.X± 0.25	.X°± 2'
.XX± 0.20	.XX°± 1'
.XXX± 0.10	.XXX°± 0.5'

UNITS mm	QWYCONN ® 深圳市启崴源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.								
MAT'L	PART NO.(INTENDED USE) 1.25T-nP	TITLE: 1.25直针针座							
FINISH	APPD:	DWG NO.: 1.25T-nP							
Q'TY PCS	CHKD:	DR: HU 2016.09.28	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1/1</td> <td>1/1</td> <td>A</td> </tr> </table>	SCALE	SHEET	REV.	1/1	1/1	A
SCALE	SHEET	REV.							
1/1	1/1	A							