
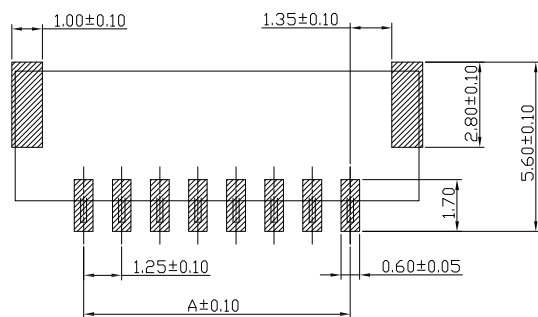


### 主要技术参数 Main Specifications

- 线数 (Poles): 02 to 15
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$
- 额定电压 (Rated voltage): 50V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range):  $-40^{\circ}C \sim +110^{\circ}C$

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
A	Insulator	1	LCP(UL94V-0)	Beige
B	Contacts	2~15	PhosphorBronze	Tin-plated
C	Solder Tab	2	PhosphorBronze	Tin-plated

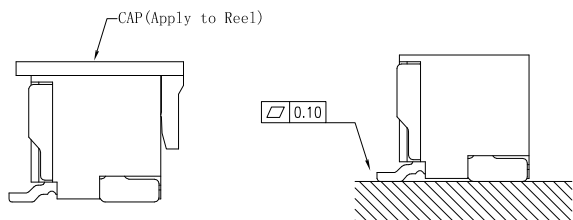

孔位	尺寸			孔位	尺寸		
	DIM A	DIM B	DIM C		DIM A	DIM B	DIM C
2P	1.25	5.75	3.95	9P	10.00	14.50	12.70
3P	2.50	7.00	5.20	10P	11.25	15.75	13.95
4P	3.75	8.25	6.45	11P	12.50	17.00	15.20
5P	5.00	9.50	7.70	12P	13.75	18.25	16.45
6P	6.25	10.75	8.95	13P	15.00	19.50	17.70
7P	7.50	12.00	10.20	14P	16.25	20.75	18.95
8P	8.75	13.25	11.45	15P	17.50	22.00	20.20

X ± 0.3	X° ± 5°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	.XX° ± 1°
.XXX ± 0.10	.XXX° ± 0.5°

UNITS: mm

MAT'L: **QWYCONN** 深圳市启崴源电子有限公司  
SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

FINISH: PART NO.(INTENDED USE) GH1.25-nAB TITLE: GH1.25立贴插座

Q'TY: APPD: CHKD: DR: HU 2016.09.28 DWG NO.: GH1.25-nAB

SCALE: 1/1 SHEET: 1/1 REV: A