


- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
 2. 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
 3. 额定电压: 50V, AC/DC(等效).
 4. 接触电阻: $\leq 0.03\Omega$.
 5. 绝缘电阻: $\geq 500M\Omega$.
 6. 产品料号:

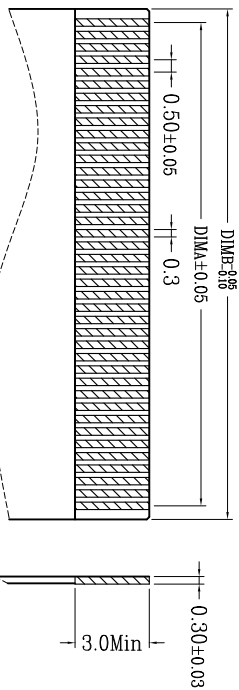

NO. OF CKT (产品PIN数) * * * * *

Plating (电镀方式) * * * * *

4: 端子全亮锡

1: 端子全金(G/F OVERALL)

Packing (包装方式) * * * * *

T: TUBE管装

001 后盖有LOGO/WD
0M 后盖有LOGO

适用扁平线

X ± 0.3	X ± 5°
X ± 0.25	X ± 2°
XX ± 0.20	XX ± 1°
XXX ± 0.10	XXX ± 0.5°

CKT	DIM A	DIM B	DIM C	CKT	DIM A	DIM B	DIM C
4	1.50	2.60	8.30	33	16.00	17.10	22.80
5	2.00	3.10	8.80	34	16.50	17.60	23.30
6	2.50	3.60	9.30	35	17.00	18.10	23.80
7	3.00	4.10	9.80	36	17.50	18.60	24.30
8	3.50	4.60	10.30	37	18.00	19.10	24.80
9	4.00	5.10	10.80	38	18.50	19.60	25.30
10	4.50	5.60	11.30	39	19.00	20.10	25.80
11	5.00	6.10	11.80	40	19.50	20.60	26.30
12	5.50	6.60	12.30	41	20.00	21.10	26.80
13	6.00	7.10	12.80	42	20.50	21.60	27.30
14	6.50	7.60	13.30	43	21.00	22.10	27.80
15	7.00	8.10	13.80	44	21.50	22.60	28.30
16	7.50	8.60	14.30	45	22.00	23.10	28.80
17	8.00	9.10	14.80	46	22.50	23.60	29.30
18	8.50	9.60	15.30	47	23.00	24.10	29.80
19	9.00	10.10	15.80	48	23.50	24.60	30.30
20	9.50	10.60	16.30	49	24.00	25.10	30.80
21	10.00	11.10	16.80	50	24.50	25.60	31.30
22	10.50	11.60	17.30	51	25.00	26.10	31.80
23	11.00	12.10	17.80	52	25.50	26.60	32.30
24	11.50	12.60	18.30	53	26.00	27.10	32.80
25	12.00	13.10	18.80	54	26.50	27.60	33.30
26	12.50	13.60	19.30	55	27.00	28.10	33.80
27	13.00	14.10	19.80	56	27.50	28.60	34.30
28	13.50	14.60	20.30	57	28.00	29.10	34.80
29	14.00	15.10	20.80	58	28.50	29.60	35.30
30	14.50	15.60	21.30	59	29.00	30.10	35.80
31	15.00	16.10	21.80	60	29.50	30.60	36.30
32	15.50	16.60	22.30				

PWYCONN 深圳市启威源电子有限公司
SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

PART NO.(INTENDED USE): TITLE: 0.5 Pitch双面拉拔(2=,5)

APPD: DWG NO.: S105250-***-***

CHKD: DR: HU 2016.09.25

SCALE 1/1 SHEET 1/1 REV. A