
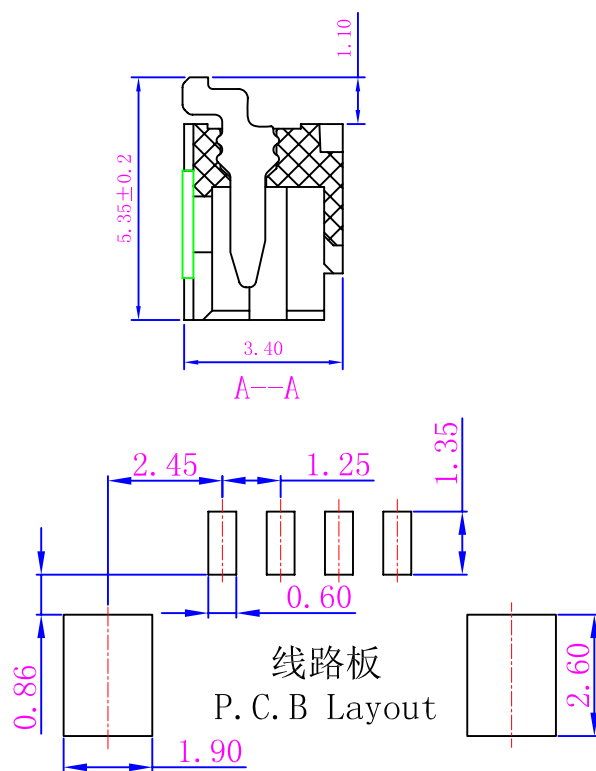


PITCH 1.25mm BAR CONNECTORS

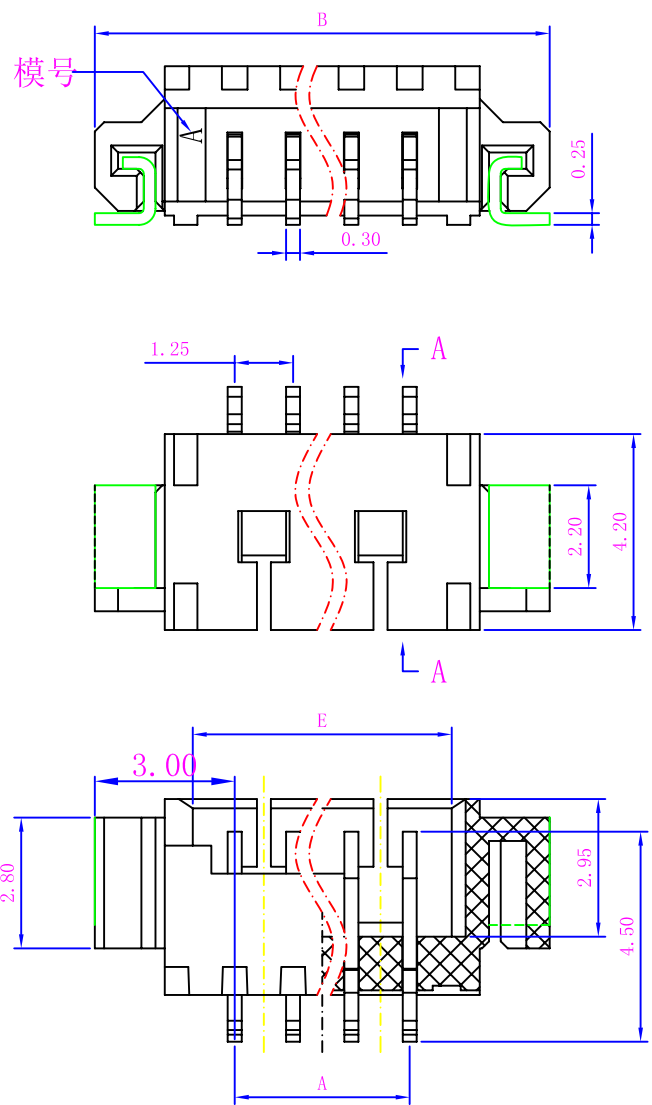

性能:

- 额定电流: 1A
- 额定电压: 100V
- 耐电压: 500V
- 接触电阻: $\leq 20m\Omega$
- 绝缘电阻: $500M\Omega$
- 工作温度: $-20^{\circ}C \sim +85^{\circ}C$
- 塑件(材质): LCP, UL94V-0
- 插簧(材质): 磷青铜, 镀锡/镀金
- 焊片(材质): 磷青铜, 镀锡/镀金

孔位	A	B	E
2	1.25	7.25	3.05
3	2.50	8.50	4.30
4	3.75	9.75	5.55
5	5.00	11.00	6.80
6	6.25	12.25	8.05
7	7.50	13.50	9.30
8	8.75	14.75	10.55
9	10.00	16.00	11.80
10	11.25	17.25	13.05
11	12.50	18.50	14.30
12	13.75	19.75	15.55
13	15.00	21.00	16.80
14	16.25	22.25	18.05
15	17.50	23.50	19.30
16	18.75	24.75	20.55

UNITS mm	QWYCONN 深圳市启崴源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.
MAT'L	
PART NO.(INTENDED USE) 1.25-D-nPWB	TITLE: 1.25mm (D型) 条形连接器卧贴式
APPD:	DWG NO.: 125N06-DWB000000
FINISH	SCALE
Q'TY	SHEET
DR: HU 2016.09.25	REV. A

X. ± 0.3	X° $\pm 5^{\circ}$
.X ± 0.25	.X° $\pm 2^{\circ}$
.XX ± 0.20	.XX° $\pm 1^{\circ}$
.XXX ± 0.10	.XXX° $\pm 0.5^{\circ}$