
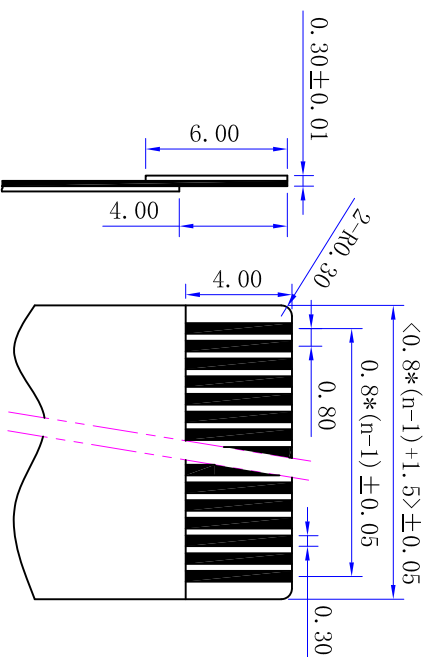


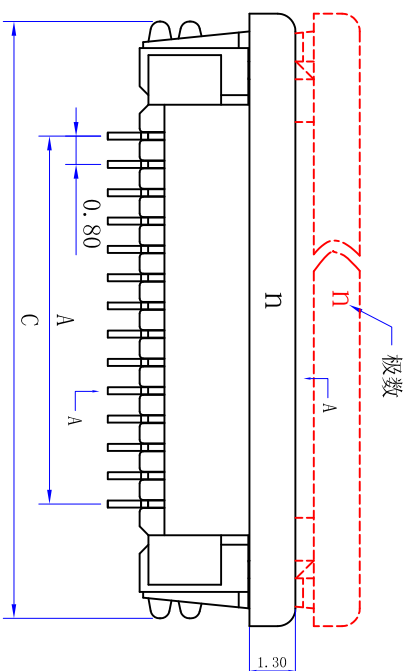


# PITCH 0.8mm FPC CONNECTOR SMT TYPE


性能:

额定电流: 0.4A  
 额定电压: 50V  
 耐电压: 200V  
 绝缘电阻:  $\leq 20m\Omega$   
 接触电阻: 500m $\Omega$   
 工作温度: -20°C~+85°C

塑件 (材质): LCP, UL94V-0  
 锁扣 (材质): LCP, UL94V-0  
 插簧 (材质): 磷青铜, 镀锡/镀金  
 焊片 (材质): 磷青铜, 镀锡/镀金

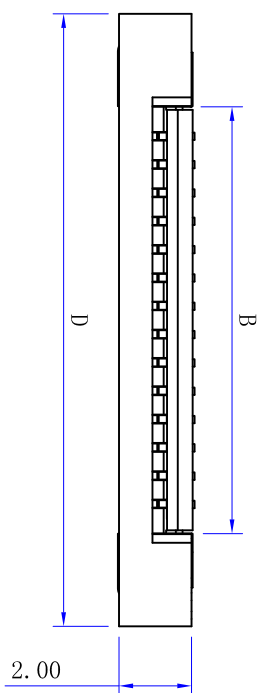

适用扁平电缆

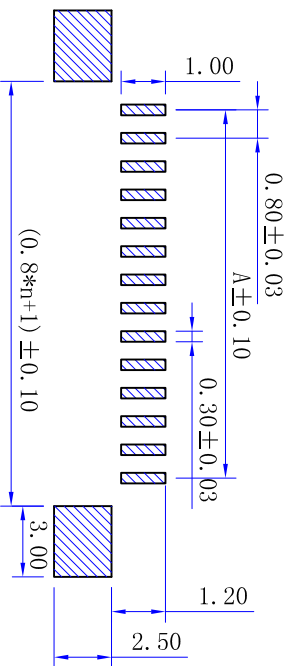

PCB Layout

孔位	A	B	C	D
4	2.4	4	9.6	10.3
5	3.2	4.8	10.4	11.1
6	4	5.6	11.2	11.9
7	4.8	6.4	12	12.7
8	5.6	7.2	12.8	13.5
9	6.4	8	13.6	14.3
10	7.2	8.8	14.4	15.1
11	8	9.6	15.2	15.9
12	8.8	10.4	16	16.7
13	9.6	11.2	16.8	17.5
14	10.4	12	17.6	18.3
15	11.2	12.8	18.4	19.1
16	12	13.6	19.2	19.9
17	12.8	14.4	20	20.7
18	13.6	15.2	20.8	21.5
19	14.4	16	21.6	22.3
20	15.2	16.8	22.4	23.1
21	16	17.6	23.2	23.9
22	16.8	18.4	24	24.7
23	17.6	19.2	24.8	25.5
24	18.4	20	25.6	26.3
25	19.2	20.8	26.4	27.1
26	20	21.6	27.2	27.9
27	20.8	22.4	28	28.7
28	21.6	23.2	28.8	29.5
29	22.4	24	29.6	30.3
30	23.2	24.8	30.4	31.1
31	24	25.6	31.2	31.9
32	24.8	26.4	32	32.7
33	25.6	27.2	32.8	33.5
34	26.4	28	33.6	34.3
35	27.2	28.8	34.4	35.1

**QWYCONN**

深圳市启晟源电子有限公司  
 SHENZHEN QIYUANYUAN ELECTRONIC CO., LTD.

PART NO.(INTENDED USE) 0.8K-AX-nPMB TITLE: 0.8mm FPC (A型) 半包下接 (H=2.0)

APPD: CHKD: DR: HU 2016.09.25 DWG NO.: 0.8K-AX-nPMB

UNITS	FINISH	PCS
MATL	Q'TY	
X.± 0.3	X <sup>±</sup> 5'	
.X± 0.25	.X <sup>±</sup> 2'	
.XX± 0.20	.XX <sup>±</sup> 1'	
.XXX± 0.10	.XXX <sup>±</sup> 0.5'	

SCALE	SHEET	REV.
1/1	1/1	A