
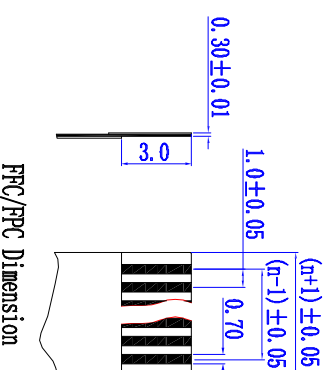

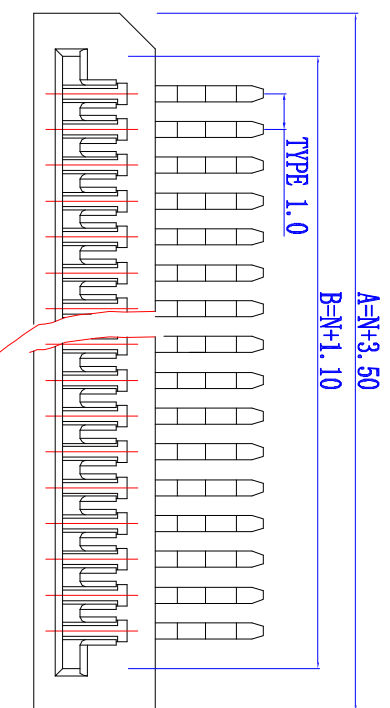


1.0mm FFC/FPC FLAT CABLE CONNECTORS

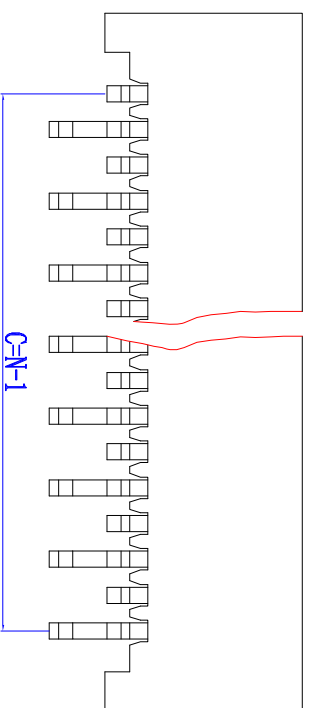


FFC/FPC Dimension

22	25.5	23.1	21				
21	24.5	22.1	20	40	43.5	41.1	
20	23.5	21.1	19	39	42.5	40.1	
19	22.5	20.1	18	38	41.5	39.1	
18	21.5	19.1	17	37	40.5	38.1	
17	20.5	18.1	16	36	39.5	37.1	
16	19.5	17.1	15	35	38.5	36.1	
15	18.5	16.1	14	34	37.5	35.1	
14	17.5	15.1	13	33	36.5	34.1	
13	16.5	14.1	12	32	35.5	33.1	
12	15.5	13.1	11	31	34.5	32.1	
11	14.5	12.1	10	30	33.5	31.1	
10	13.5	11.1	9	29	32.5	30.1	
9	12.5	10.1	8	28	31.5	29.1	
8	11.5	9.1	7	27	30.5	28.1	
7	10.5	8.1	6	26	29.5	27.1	
*6	9.5	7.1	5	25	28.5	26.1	
5	8.5	6.1	4	24	27.5	25.1	
4	7.5	5.1	3	23	26.5	24.1	
Poles	A	B	C	Poles	A	B	C

性能:

- 额定电流: 0.5A
- 额定电压: 50V
- 耐电压: 500V
- 接触电阻: 20mΩ
- 绝缘电阻: 800MΩ
- 工作温度: -25℃~+85℃
- 主体(材质): PA46, UL94V-0
- 插簧(材质): 磷青铜, 镀锡

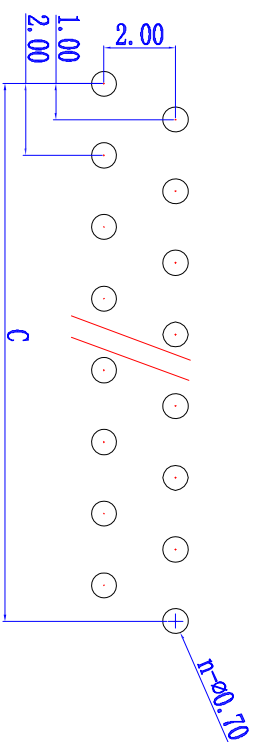

1.0-A-nPW 印制电路板
P.C.B Layout

UNITS	mm
X± 0.3	X ² ± 5'
X± 0.25	X ² ± 2'
XX± 0.20	XX ² ± 1'
XXX± 0.10	XXX ² ± 0.5'

MAT'L	FINISH	Q'TY
		PCCS

QWYCONN 深圳市启威源电子有限公司
SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

PART NO.(INTENDED USE): 1.0-A-nPWX下接
TITLE: 1.0单面接弯插下接

APPD: DWG NO.: 1.0-A-nPWX下接

CHKD: DR: HU 2016.09.28

SCALE: 1/1 SHEET: 1/1 REV: A