
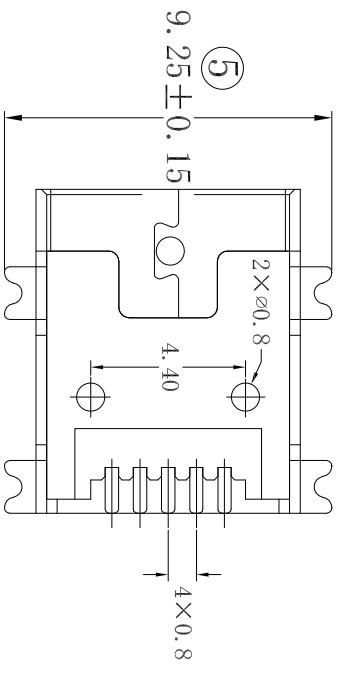


**RECOMMENDED PCB LAYOUT**

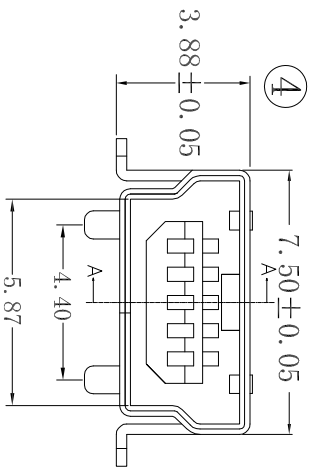


特性: Specifications:  
 电器: Electrical:  
 接触阻抗: Contact Resistance  
 50 milliohms MAX

耐压: Dielectric Withstanding Voltage:  
 100 V AC AT Sea Level

绝缘阻抗: Insulation Resistance:  
 100 MEGA ohms MIN

材料: Material:  
 塑胶: Housing: High Temperature Thermoplastics,  
 UL 94V-0 耐高温塑胶  
 端子: Contact: Copper Alloy 铜合金  
 铁壳: Shell: Copper Alloy 铜合金  
 电镀: Finish:  
 端子: Contact: Plated Gold in Mating Area;  
 Tin On Solder Tails  
 接触点镀金. 脚镀锡

铁壳: Shell:  
 Nickel/ Plating 镀镍



SECTION A-A

UNITS mm	PART NO.(INTENDED USE) <b>QWYCONN</b> MINI USB 5P		TITLE: MINI USB B-TYPE 5P SMT 母座 (0.31)
MATL	APPD: XXX± 0.25		DWG NO.: A036
FINISH	CHKD: XXX± 0.10		SCALE 1/1
QTY PCS	DR: HU 2016.09.28		SHEET 1/1
			REV. A

深圳市启威源电子有限公司  
 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.