

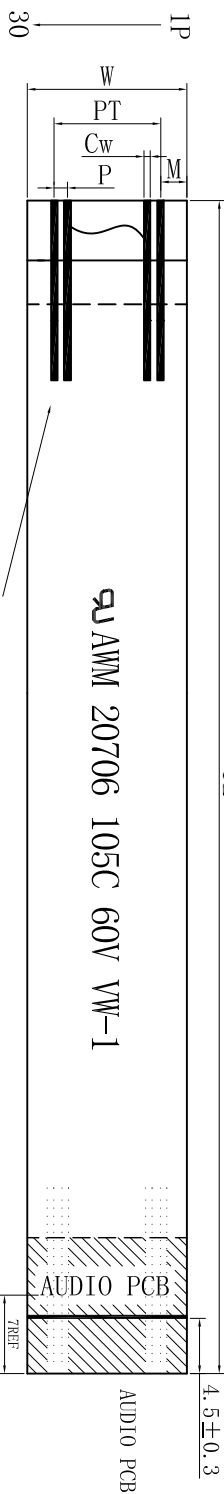


TL


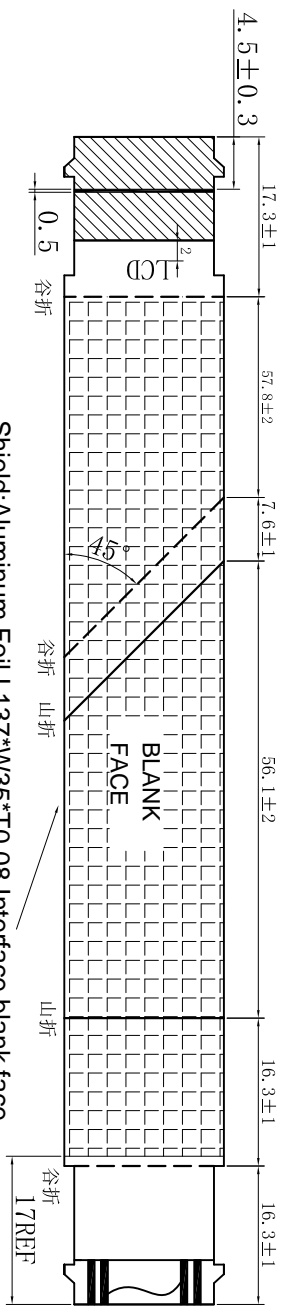


QJ AWM 20706 105C 60V VW-1

Grounding pins: 1.6, 22, 30, Tin plating S2 supporting tape paste 4.5 raise 1, 2

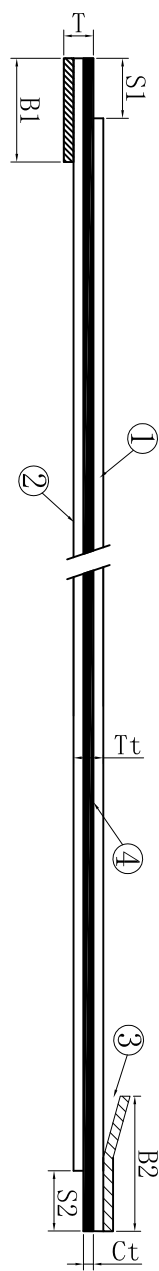

Shield: Aluminium Foil, L137*W35*T0.08, Interface blank face
Two ends supporting tape draw black line, not including line wide:
two end sprinkler, the handwriting is clear.

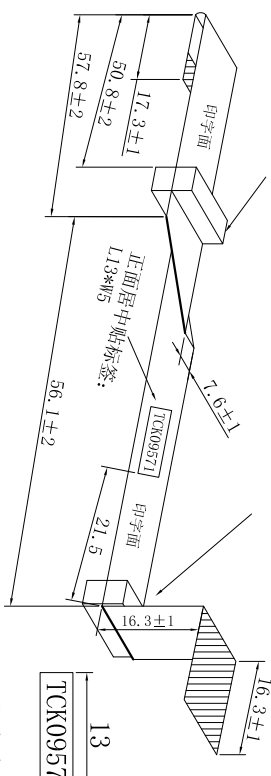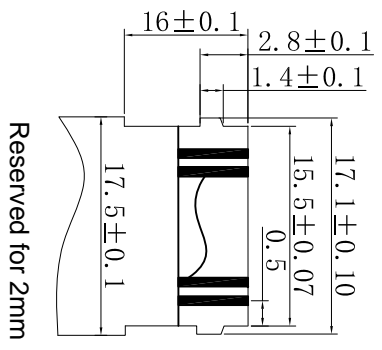

Two ends paste Water foam: From the crease 1.7mm two faces paste
L5*W17.5*T4.0(2pcs) water foam: L5*W17.5*T4.0(2.0pcs)

Label

SPEC		DETAIL:	
①	ITEM	Insulation Materials	
①	DETAIL:	Print UL20706 60um	
②	ITEM	Insulation Materials	
②	DETAIL:	Blank UL20706 60um	
③	ITEM	Supporting tape	
③	DETAIL:	Blue 225um	
④	ITEM	Conductor	
④	DETAIL:	Ct 0.035	±0.005
		Cw 0.30	±0.03

SPEC			
No.of conductors	N	30	
Pitch	P	0.5	±0.06
Total length	TL	171.4	±2.0
Total pitch	PT	14.5	±0.06
Margin Width	M1/M2	1.5/0.5	±0.06
Total width	W1/W2	17.5/15.5	±0.06
Strip length	S1	3.0	±0.5
	S2	3.0	±0.5
Reinforcing	B1	5.0	±1.0
tape length	B2	16.5	±2.0
Terminal thickness	T	0.32	±0.03
Thickness insulation	Tt	0.155	±0.03
Slanting	A	≤0.3	

特殊要求 (Special requirements):
1、Storage condition(储存条件):
Temp: 15° C~25° C(温度 15° C~25° C)
Humidity: 30~60RH%(湿度 30~60RH%);
2、产品符合: RoHS标准;
Products conform to the RoHS standard
3、镀层: Ni ≥40" Au ≥3" ;
Coating: Ni p 40 Au 3 or higher;

Material			
4	Label		PCS
3	Aluminum Foil	L137.4*W35*10.08	PCS
2	Water foam	L5*W17*14.0	PCS
1	SPEC	ITEM	QTY UNIT

SPEC: B*0.5*30*171.4(3/3/5/16.5)(0.035*0.3) 225 60白+60字 镀金