

REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

电气特性/Electrical Specification





额定参数/Rated	300V 20A
接触电阻/Contact Resistance	20MΩ MAX
绝缘电阻/Insulation Resistance	5000MΩ/1000V
抗电强度/Dielectric Strength	2000V/1 min

机械特性/Mechanical Specification

使用温度/Temp range	-40° C ~ +105° C
扭矩/Torque	0.5Nm
线径/Wire range	22-16AWG

部件材质/Part&Material

塑件/Housing	PA66 UL94 V-0
螺丝/Screws	M3 钢 镀镍/Steel Ni plating
端子/Terminal	黄铜 镀锡/Brass Tin plating

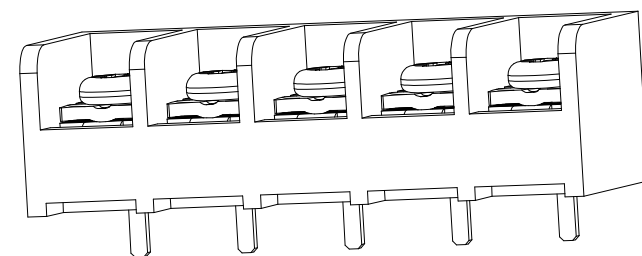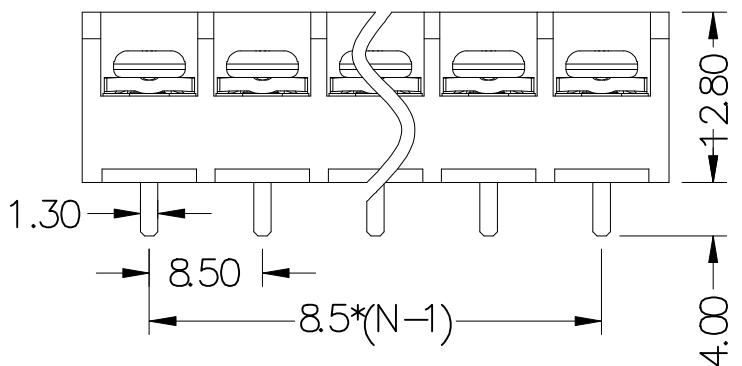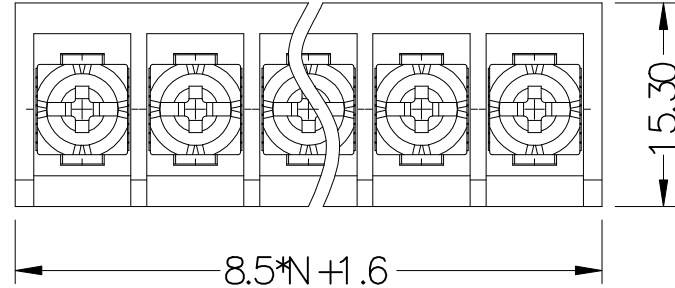

DESIGN:	Xiping Huang	QWYCONN 深圳市启崴源电子有限公司			
CHECK:	Ke Tian	SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.			
APPROVED:	Youquan Xu	TITLE:			
DIM	TOL	DIM	TOL	PART NO.	
X.	±0.25	X°	±3.0°	REV. A	
X.X	±0.20	X.X°		SCALE:	N/A
X.XX	±0.15	X.XX°		UNIT:	mm
X.XXX		X.XXX°		SHEET:	1/1