







| STRUCTURE (构造) | | | | |
|------------------|-----------------------|---------------------|-----------|--------|
| NO. | ITEM (项目) | SPECIFICATION (规格) | | |
| 1 | INSULATION (胶膜) | 印字:通用版20706 (60um) | | |
| | | 白膜:105°C 60V (60um) | | |
| 2 | SUPPORTING TAPE (补强板) | 225um | Blue (蓝色) | |
| 3 | CONDUCTOR (导体) | Thickness (厚度) | 0.035 | ±0.005 |
| | | Width (宽度) | 0.65 | ±0.03 |
| CONDUCTOR (导体镀层) | PLATED (电镀) | 锡Sn (40u") | MIN | |
| | PLATED (电镀) | | | |

| DIMENSION (尺寸) | | | | |
|--------------------------------|---------------------|-------|-------|------|
| No. of conductors (导体数目) | N | 30 | / | |
| Pitch (间距) | P | 1.0 | ±0.06 | |
| Span (总间距) | SP | 29.0 | ±0.1 | |
| Width (总宽度) | W | 31.0 | ±0.1 | |
| Margin (边缘宽度) | M | 1.0 | ±0.1 | |
| Total length (总长度) | TL | 50 | ±2.0 | |
| Insert Thickness (插接端厚度) | T | 0.32 | ±0.03 | |
| Surface Thickness (线身厚度) | ST | 0.155 | ±0.05 | |
| | Strip Length (裸铜长度) | S1 | 2.5 | ±0.5 |
| | | S2 | 4.0 | ±0.5 |
| Supporting Tape Length (补强板长度) | B1 | 8.0 | ±1.5 | |
| | B2 | 8.0 | ±1.5 | |

| Material List (辅料清单) | | | |
|----------------------|-----------|---------------|----------|
| NO. | ITEM (项目) | SPEC (规格) | QTY (数量) |
| A | 铁壳(QY) | 1.0*30PIN 一键式 | 1PCS |
| | | | |
| | | | |
| | | | |
| | | | |

技术要求:
 1、保存环境:
 温度: 15~25°C 湿度: 30~50RH%
 2、保质期:
 镀金: 12个月 镀锡: 6个月
 3、产品符合RoHS 2.0标准

| REV. | ECN NO. | LOCAS. | DESCRIPTION | DATE | DESIGN |
|------|---------|--------|-------------|------|--------|
| A | | | NEW DRAWING | | |

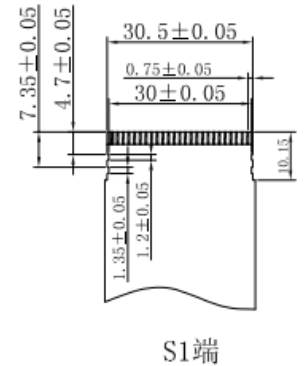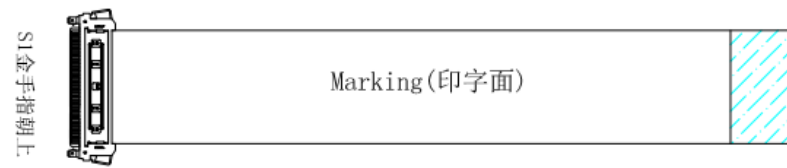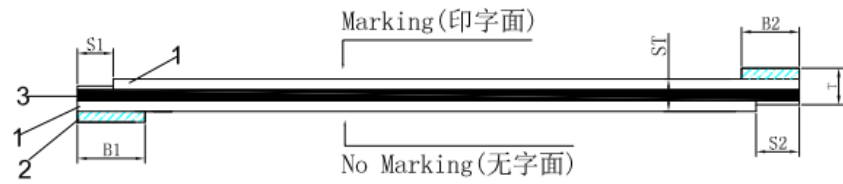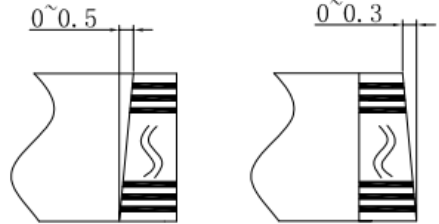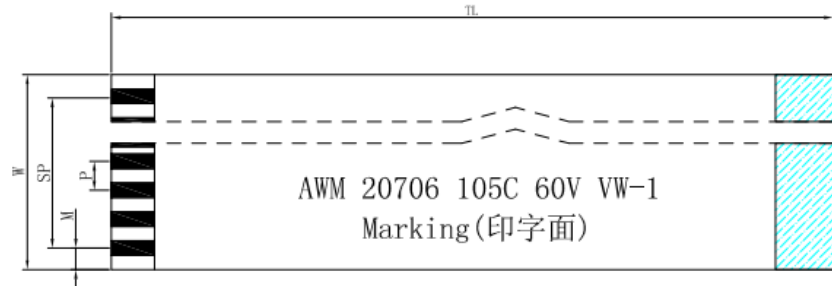

| | | | | |
|-----------|--------------|--------|---|----------|
| DESIGN: | Xiping Huang | | QWYCONN® 深圳市启崑源电子有限公司 | |
| CHECK: | Ke Tian | | SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD. | |
| APPROVED: | Youquan Xu | | TITLE: 1.0*30*50*B(2.5/4/8/8) (0.035*0.65) | |
| DIM | TOL | DIM | TOL | PART NO. |
| X. | ±0.25 | X° | ±3.0° | |
| X.X | ±0.20 | X.X° | | |
| X.XX | ±0.15 | X.XX° | | |
| X.XXX | | X.XXX° | | |
| REV. | A | SCALE: | N/A | UNIT: mm |
| | | SHEET: | 1/1 | |